




.....
Model shown with the optional
3-sided bumper kit.
.....

GSVM

Specialty Vertical, Self-Contained
Medium Temperature Merchandiser


Specialty Vertical, Self-Contained Merchandiser for Beverage, Dairy, Deli and Produce Applications

GSVM - Specialty Vertical Merchandiser

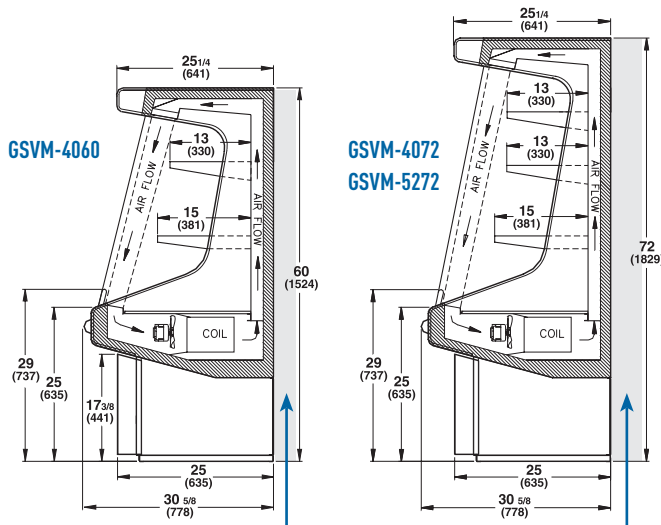

Clearance required. Refer to installation instructions.

Plan View

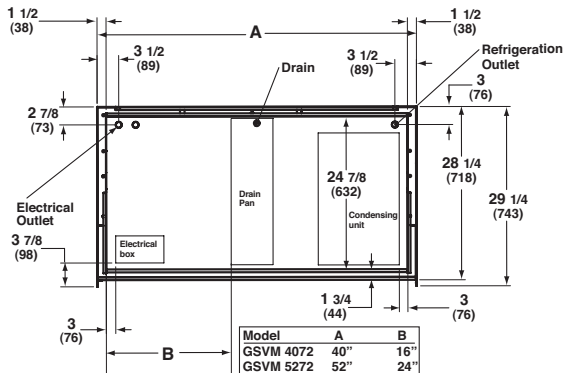

GSVM-4060 Only



NEMA 5-20P

Advanced Design.

- Increased product visibility with narrow canopy.
- Plexiglass ends for side visibility.
- All GSVM merchandisers have the same contour and line up together to create extended product displays.

Merchandising with Style.

- Three models available with canopy and shelf lighting.
- Easy access to display levels for merchandising or shopping.

Smart Construction.

- Easy to clean interior and exterior.
- Easy to service slide out condensing unit.
- Ends are foam insulated for superior operating efficiency.
- Timer controlled automatic defrost and thermometer.
- Electric condensate (Model GSVM-4060 only).
- Two-positioned lighted cantilever shelves.

Innovative Refrigeration.

- Front air intake and discharge (Models GSVM-4060, 4072).
- Front air intake and rear air discharge (Model GSVM-5272 only) - requires a 5-inch min. open space behind the back of the case.
- State-of-the-art honeycomb discharge air system assures even temperature and maximum efficiency.
- Adjustable temperature control.

Optional Accessories.

- Additional shelving.
- Stainless steel exterior or choice of exterior colors.
- Wrap-around bumper.
- LED light kits (white and black).
- LED shelf light kits for 10-inch and 13-inch (white and black).
- Leg and caster kits.
- Black PTM kits.
- Night cover (Standard in GSVM-5272).
- Cross bar and hook display.
- Locking security cover.
- Type II kits (80°/55% R.H.).
- High humidity condensate pan kit (GSVM-4072 and GSVM-5272 models) 9-amp, 120-volt, 1000-watt, requires dedicated 15-amp circuit.

Specifications

Model	Exterior Dimensions			Nom. HP	Refrig.	Hz/Ph	Electrical			NEMA Plug	Refrig.** Load (BTU/h)	A/C Load (BTU/h)	Approx. Ship Wt. (lbs)
	L	D	H				Run Amps	Fuse Amps	Volts				
GSVM-4060	40"	30-5/8"	60"	3/4	R-134a	60/1	115	16.0	20	5-20P	4410	6068	380
GSVM-4072	40"	30-5/8"	72"	3/4	R-134a	60/1	115	17.0	25	Hardwired*	4410	6068	425
GSVM-5272	52"	30-5/8"	72"	3/4	R-404a	60/1	115	19.5	25	Hardwired*	4610	6340	600

* Requires field wiring. Length dimensions are without optional bumpers.

** Refrigeration load calculated at 20° F evaporation and 110° F condensing temperature.



NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75° F and 55% R.H. Case is designed for holding pre-chilled product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit www.hussmann.com.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

HUSSMANN®

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 314.291.2000

www.hussmann.com