
HUSSMANN®




LBN

Hortizontal, Self-Contained Low Temperature Merchandiser

LBN - Hortizontal Low Temp Merchandiser

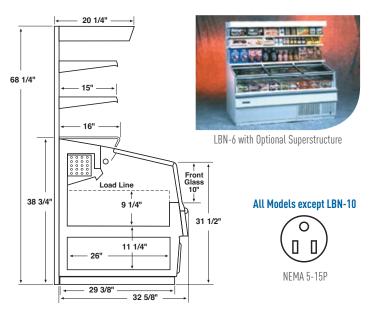

Plan View



Advanced Design.

- Large 10" front window provides greater product viewing area.
- "Sweep back" design of lower merchandiser enhances product visibility and provides customer "toe" space for easy access to product display.
- Enhanced design and visibility stimulates impulse product sales.

Merchandising with Style.

- Slide-out refrigeration and electrical components accessible from front.
- Front air discharge for positioning merchandisers.
 back-to-back or against wall LBN-10 has rear air discharge.

Smart Construction.

- Built to last with minimum maintenance.
- Durable white powder coated paint exterior finish.
- Standard front bumper design protects merchandiser front.
- Tempered glass low-E fog-resistant lids.
- CFC-free blown in urethane insulation.


Optional Accessories.

- Laminate countertop with choice of exterior cabinet colors.
- Superstructure available with lighted or unlit canopy.
- Display compartment shelves.
- Bag rack.
- Novelty baskets.
- Leg and Caster kits.
- Lid lock (1 lock per 2 lids)

Specifications

	Exterior Dimensions			Electrical Run Fuse NEMA						NEMA	*Refrig. Load	A/C Load	Energy Comsumption	Approx. Ship Wt.
Model	L	D	Н	HP	Refrig.	Hz/Ph	Volts	Amps	Amps	Plugs	(BTU/h)	(BTU/h)	(kWh/day)	(lbs)
LBN-4	48-1/2"	32-5/8"	38-3/4"	1/2	R-404a	60/1	115	10.2	15	5-15P	2924	5993	13.58	515
LBN-6	72"	32-5/8"	38-3/4"	1/2	R-404a	60/1	115	10.2	15	5-15P	3330	6827	15.38	663
LBN-7	84-1/4"	32-5/8"	38-3/4"	3/4	R-404a	60/1	115	11.5	15***	5-15P	4000	8200	18.52	745
LBN-8	95-5/8"	32-5/8"	38-3/4"	3/4	R-404a	60/1	115	12.0	15***	5-15P	4600	9430	20.20	815
LBN-10**	118-7/8"	32-5/8"	38-3/4"	1	R-404a	60/1	115 208-230	27 7.7	15	6-15P	5400	11068	22.70	967

^{*} Refrigeration load calculated at -25° F evaporation temperature and 110° F condensing temperature.



^{***15} Amp time delay breaker or fuse required.





NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. Case is designed for holding pre-frozen product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit www.hussmann.com.



Hussmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.



Hussmann Corporation

12999 St. Charles Rock Rd. Bridgeton, MO 63044-2483 Ph: 314.291.2000