




## SN/SM

Self-Contained, Medium and Low Temperature  
Mobile Spot Merchandiser

# Self-Contained, Medium and Low Temp Mobile Spot Merchandiser for Meat to Pizza Applications

**SN** - Low Temperature, Solid Glass Top Spot Merchandiser

**SM** - Medium Temperature, Open Top Spot Merchandiser

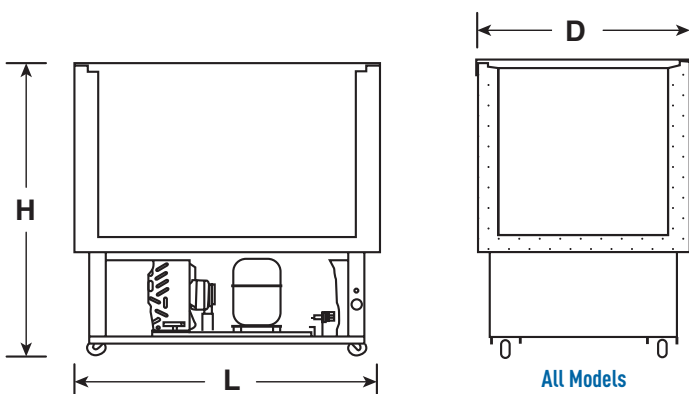

## Specifications

Model	Exterior Dimensions			Cu Ft	Approx. Ship Wt. (lbs)
	L	D	H		
SN-090	35-1/2"	24-1/2"	36"	6.73	167
SN-115	45"	24-1/2"	36"	8.83	190
SN-190	75"	24-1/2"	36"	15.40	300
SM-115*	45"	24-1/2"	34-1/2"	8.83	178
SM-110*	41"	29"	34"	12.00	162

## Electrical

Model	Refrig.	Hz/Ph	Volts	Run Amps	A/C Load (BTU/h)	Energy Consumption (kWh/day)
SN-90	R-404a	60/1	115	4.5	1590	3.16
SN-115	R-404a	60/1	115	4.5	1590	3.96
SN-190	R-404a	60/1	115	6.5	2460	4.04
SM-115*	R-404a	60/1	115	4.5	2460	-
SM-110*	R-404a	60/1	115	6.5	1590	-

\* SM models not designed for ice cream use.



Husmann refrigerated merchandisers configured for sale for use in the United States meet or surpass the requirements of the DOE 2012 energy efficiency standards.

**HUSMANN®**

## Advanced Design.

- Maximum product facings in minimum floor space.
- Optional color custom graphics.
- E-coated tempered glass sliding lids (SN models).
- SM-110 designed for merchandising six 12" diameter pizza facings.

## Merchandising with Style.

- Versatility and mobility.
- Easy to merchandise and move anywhere in your store for added impulse sales.

## Smart Construction.

- Interior and exterior heavy-gauge steel.
- White baked polyester powder coating for superior rust and impact resistance.
- Molded one-piece collars of high impact ABS plastic provide thermal break.
- Wraparound evaporators supply cold from all four walls.
- Eight-foot electrical supply cord standard.
- Two-inch swivel casters.
- Designed for easy installation, service and clean-up.

## Innovative Refrigeration.

- Sealed refrigeration systems utilizing R404A CFC-free refrigerant.
- Ends are foam insulated for superior operating efficiency.
- Thermostatic control provides continuous range of temperature settings - SM models from 10°F to 40°F and SN models from 0°F to -10°F.
- Thermometer standard on all SN models.

## Optional Accessories.

- Choice of exterior colors
- Adjustable bottom rack- stainless steel. Elevates bottom to three different levels for minimum product display or for fragile packages that should not be stacked.
- Frost accumulator-aluminum collar which accumulates frost. Lifts out for defrost without moving products. Protects evaporator.
- Sign holders.
- Hanging baskets.
- Bumpers.
- Personalized graphics.
- Baskets not available for SM-110.

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. Case is designed for holding pre-chilled product only.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

For additional resources and warranties, contact your representative or visit [www.husmann.com](http://www.husmann.com).

**Husmann Corporation**  
12999 St. Charles Rock Rd.  
Bridgeton, MO 63044-2483  
Ph: 314.291.2000

[www.husmann.com](http://www.husmann.com)